


The SpilMax[®] range of absorbents have undergone extensive testing to ensure their absorbency and performance, even when under extreme industrial use.

SpilMax[®] UniChem Absorbent Rolls are the most versatile absorbent option. They are ideal in any general purpose or chemical spill kit. UniChem pads will absorb water, oils, fuels, diesel, coolant, general workplace chemicals and common agricultural chemicals as well as hazardous chemical spills of strong oxidisers, acids, alkalis and caustics.

Rolls are perforated pads that will tear off in custom sized sheets. These are ideal for use under vehicles and equipment during maintenance or refueling and to create set down areas for containers or leaking equipment. Single pads can be used to capture small leaks, clean up small spills and wipe down tools, equipment or drum tops.

Made of melt blown polypropylene with dimples and scrim for greater durability. Each pad absorbs 1L per saturation. Pads can be wrung out and reused many times during spill clean up.

TESTING: ASTM Test Method F726-06
"Sorberent Performance of Absorbents" to test maximum oil capacity.

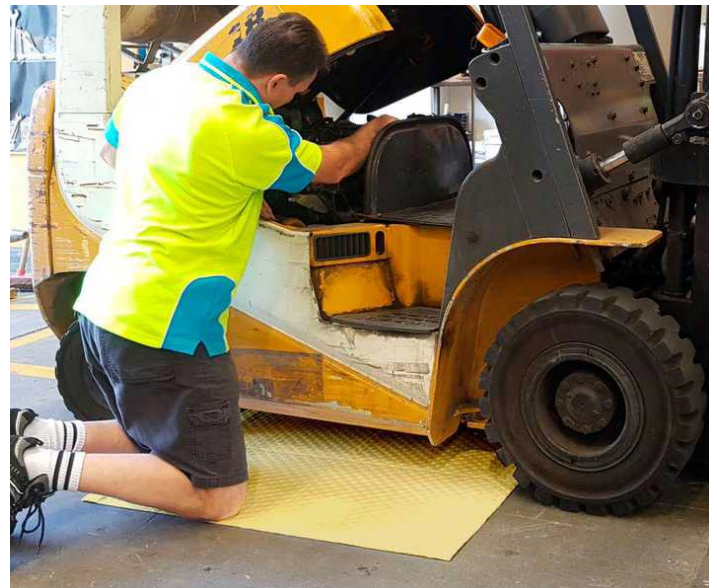

CODE	GSM	SIZE	DIMENSIONS	WEIGHT
CH1310	400gsm	43mL x 960mmW Roll	0.48mL x 0.48mW x 0.96mH	15 kg
CH13103	400gsm	43mL x 480mmW Half Roll	0.48mL x 0.48mW x 0.48mH	8 kg
CH1309	200gsm	43mL x 960mmW Roll	0.35mL x 0.35mW x 0.96mH	8 kg
CH13093	200gsm	43mL x 480mmW Half Roll	0.35mL x 0.35mW x 0.48mH	4 kg

